



# PX262-MIG MIG WELDER and GUN PACKAGE



PART NO.	DESCRIPTION
PX262-MIG	Welding machine 300 amps

### FEATURES:

- Features FAN (fan as needed). Reduces noise, energy usage and contaminants pulled into machine.
- Two (2) gear driven rolls with tool-less roll change. (Uses Miller style drive rolls).
- .035/.045 solid wire drive rolls included.
- Accepts Miller style gun connection.
- Digital LED meters for voltage, wire feed speed and amperage.
- Presetting of voltage and wire feed speed. Ensures precise parameters and accuracy.
- 14 pin receptacle for direct connection of 24VAC wire feeders or spool gun.
- 8 pin receptacle for direct connection of PROFAX AEC-200-4 spool gun.
- Side mounted hanger for MIG gun and leads.
- Single cylinder rack with securing chain.
- Factory installed running gear.

### APPLICATIONS:



- Metal fabrication
- Maintenance and repair
- Automotive workshops
- Farm / home
- Light industrial

### PROCESSES:

- MIG (GMAW)
- Flux-cored (FCAW)

### COMES COMPLETE WITH:

- 15 ft. mig gun (FCM-250-4045-15)
- 10 ft. work cable with clamp
- 10 ft. input power cord (plug not included)
- RF1430-580 flowmeter/regulator w/10 ft. gas hose
- Dual groove reversible .035/.045 solid wire drive rolls
- Extra contact tips and nozzle
  - o 2ea .035 contact tips (17S-35)
  - o 2ea .045 contact tips (17S-45)
  - o 1ea 5/8" nozzle (27K62)

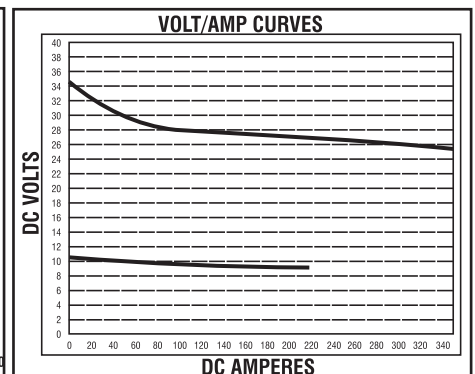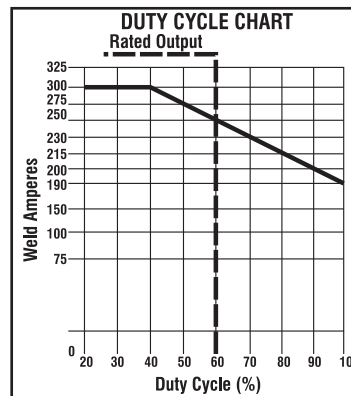

Amperage Range	Rated Output	Input at Rated Output, 60 Hz				Wire Feed Speed	Wire Type and Diameter	Maximum Spool Size	Max. OCV	Dimensions In (mm)	Weight lb (kg)
		Volts	Amps	KW	KVA						
30-300 A	300 A @ 28 VDC 40% duty cycle	208	55	9.4	10.5	50-850 ipm (1.3-20 m/min)	Solid/stainless steel: .035-.045 (0.9-1.2 mm) Flux-cored: .035-.045 (0.9-1.2mm)	12" (305mm)	35 VDC	Height: 31.2 (794) Width: 14.2 (362) Length: 38 (965)	Net: 264.5 (120) Ship: 332 (151)
	250 A @ 26.5 VDC 60% duty cycle	230	53	9.3	11.5						
	190 A @ 23.5 VDC 100% duty cycle	460	26.5	8.3	10.3						

Input Power 208/230/460, single-phase, 60 Hz Shipped from factory set for 460VAC

**3 YEAR WARRANTY**