



# TURNING ROLLS



## MODEL NO:


# TR-2000 • 115V

230V model available (TR-2000-2)



## FEATURES:

- Includes One Drive and One Idler
- 1-1/2" to 24" Diameter
- 7.5-75 IPM Rotation Speed
- 2" x 10" Rubber Wheels
- Adjustable Drive Tension
- Foot Control w/12' Cord Included
- High Frequency Protected
- 115V Input Power / 5 Amp
- Shipping Weight 146 lbs.
- 1 Year Warranty



Maximum load capacity 2,000 lbs. (set)  
(1,000 lbs. max for each drive and idler)

\*Maximum rotational capacity 3,000 lbs. with additional idlers.

\*Note: Additional idler rolls available **PROFAX NO: IR-1000**

\*See page 26 for optional controls.

## MODEL NO:

# TR-5000 • 115V

230V model available (TR-5000-2)

## FEATURES:

- Includes One Drive and One Idler
- 4" - 60" Diameter
- 10-100 IPM Rotation Speed
- 3" x 10" Polyurethane Wheels
- Easy Wheel Spacing Adjustment
- Fwd./Rev. Foot Control w/12' Cord Included
- High Frequency Protected
- 115V Input Power / 10 Amp
- Shipping Weight 430 lbs.
- 1 Year Warranty





Maximum load capacity 5,000 lbs. (set)  
(2,500 lbs. max for each drive and idler)

\*Maximum rotational capacity 7,500 lbs. with additional idlers.

\*Note: Additional idler rolls available **PROFAX NO: IR-2500**

\*See page 26 for optional controls.

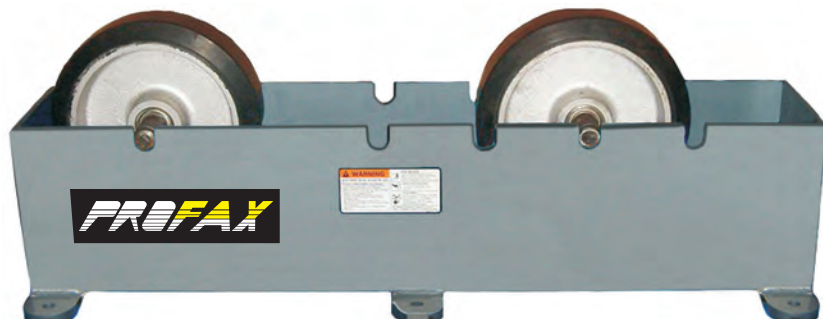



# TURNING ROLLS



## MODEL NO:

# TR-10000 • 115V


230V model available (TR-10000-2)

### FEATURES:

- 5-Ton Capacity (1 Drive / 1 Idler Max. 2½ Ton Each)
- 7½ Ton Rotating Capacity w/Additional Idler(s)
- 12" to 96" Diameter Capacity
- 4.5-45 IPM Rotation Speed
- Easily Adjustable Wheel Spacing
- 4" x 12" Wheels / Polyurethane Over Steel
- 115V Input Power / 10 Amp
- 2/3 H.P. Motor
- Hand Pendant Control w/25' Cord (24V)
- Weight: 720 lb. (1 Drive / 1 Idler)
- 1 Year Warranty



## 5-Ton Turning Roll Set



\*See page 26 for optional controls.

\*Note: Additional idler rolls available PROFAX NO: **IR-5000**


## MODEL NO:

# TR-20000 • 115V



230V model available (TR-20000-2)

### FEATURES:

- 10-Ton Capacity (1 Drive / 1 Idler Max. 5-Ton Each)
- 15 Ton Rotating Capacity w/Additional Idler(s)
- 20" to 192" Diameter Capacity
- 4.8-48 IPM Rotation Speed
- Easily Adjustable Wheel Spacing
- 5" x 13½" Wheels / Polyurethane Over Steel
- 115V Input Power / 15 Amp
- 1 H.P. Motor
- Hand Pendant Control w/25' Cord (24V)
- Weight: 1,320 lb. (1 Drive / 1 Idler)
- 1 Year Warranty

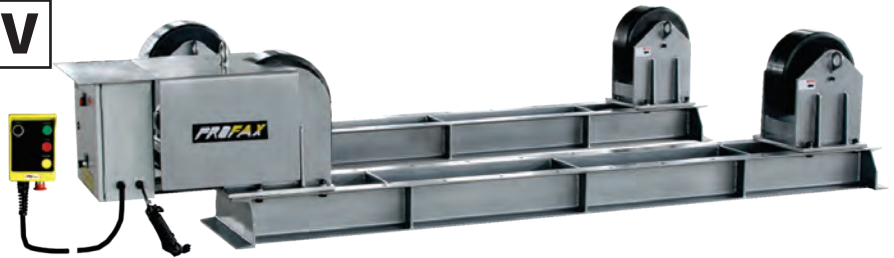

## 10-Ton Turning Roll Set



\*See page 26 for optional controls.

\*Note: Additional idler rolls available PROFAX NO: **IR-10000**

## MODEL NO:


# TR-40000 • (460V 3PH)

### FEATURES:

- 20-Ton Capacity (1 Drive / 1 Idler Max. 10 Ton Each)
- 30 Ton Rotating Capacity w/Additional Idler(s)
- 20" to 216" Diameter Capacity
- 6 - 64 IPM Rotation Speed
- Easily Adjustable Wheel Spacing
- 6" x 13½" Wheels / Polyurethane Over Steel
- 460V Input Power / 10 Amp
- 2 ea./1 H.P. Motors
- Hand Pendant Control w/25' Cord (24V)
- Weight: 2,315 lb. (1 Drive / 1 Idler)
- 1 Year Warranty



## 20-Ton Turning Roll Set



\*See page 26 for optional controls.

\*Note: Additional idler rolls available PROFAX NO: **IR-20000**



# TURNING ROLLS



## MODEL NO:

**TR-60000 • (460V 3PH)**

### FEATURES:


- 30-Ton Capacity (1 Drive / 1 Idler Max. 15 Ton Each)
- 45 Ton Rotating Capacity w/Additional Idler(s)
- 20" to 216" Diameter Capacity
- 6 - 58 IPM Rotation Speed
- Easily Adjustable Wheel Spacing
- 6" x 13½" Wheels / Polyurethane Over Steel
- 460V Input Power / 10 Amp
- 2 ea./1½ H.P. Motors
- Hand Pendant Control w/25' Cord (24V)
- Weight: 2,340 lb. (1 Drive / 1 Idler)
- 1 Year Warranty



## 30-Ton Turning Roll Set

See page 26 for optional controls

\*Note: Additional idler rolls available PROFAX NO: **IR-30000**



## MODEL NO:

**TR-120000 • (460V 3PH)**

### FEATURES:


- 60-Ton Capacity (1 Drive/1 Idler Max. 30 Ton Each)
- 100 Ton Rotating Capacity w/Additional Idlers
- 34" to 300" Diameter Capacity
- 6 - 60 IPM Rotation Speed
- Easily Adjustable Wheel Spacing
- 20½" x 11¾" Wheels/Polyurathane Pressed on Steel (3 Tires make total width)
- Overload Discs
- 460V Input Power/15 Amp
- 2 ea./2 H.P. Motors
- Hand Pendant Control w/25' Cord (24V)
- Weight: 5,600 lb. (1 Drive/1 Idler)
- 1 Year Warranty



## 60-Ton Turning Roll Set

See page 26 for optional controls

\*Note: Additional idler rolls available PROFAX NO: **IR-60000**




## MODEL NO:

**TR-240000 • (460V 3PH)**

### FEATURES:

- 120-Ton Capacity (1 Drive/1 Idler Max. 60 Ton Each)
- 180 Ton Rotating Capacity w/Additional Idler(s)
- 34" to 300" Diameter Capacity
- 5 - 51 IPM Rotation Speed
- Easily Adjustable Wheel Spacing
- 20½" x 23¾" Wheels/Polyurathane Pressed on Steel (6 Tires make total width)
- Overload Discs
- 460V Input Power/30 Amp
- 2 ea./5.35 H.P. Motors
- Hand Pendant Control w/50' Cord (24V)
- Weight: 6,000 lb. (1 Drive/1 Idler)
- 1 Year Warranty

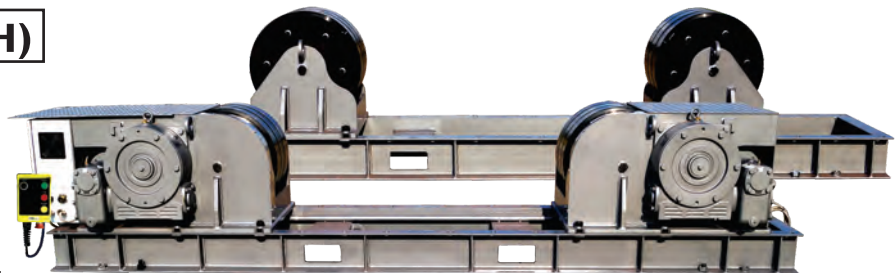

## 120-Ton Turning Roll Set

See page 26 for optional controls

\*Note: Additional idler rolls available PROFAX NO: **IR-120000**

